

Europäisches Patentamt  
European Patent Office  
Office européen des brevets



(11)

EP 1 026 910 A1

(12)

## EUROPEAN PATENT APPLICATION

(43) Date of publication:  
09.08.2000 Bulletin 2000/32

(51) Int Cl. 7: H04Q 7/32

(21) Application number: 99102399.5

(22) Date of filing: 08.02.1999

(84) Designated Contracting States:  
AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU  
MC NL PT SE  
Designated Extension States:  
AL LT LV MK RO SI

(72) Inventor: **Walton, Mark James**  
Reading, Berkshire RG2 7BD (GB)


(74) Representative: **VOSSIUS & PARTNER**  
Siebertstrasse 4  
81675 München (DE)

(71) Applicant: **NEC CORPORATION**  
Tokyo (JP)

(54) **Mobile radio station**

(57) A mobile radio station for use in a mobile radio network in which the number of monitored neighboring radio base stations can be reduced for power saving purposes without significantly degrading cell reselection performance. A reception field strength of a current cell and of signals transmitted from radio base stations neighboring the current cell is measured. If the reception field strength of a current cell is less than a first threshold that has been previously determined, a rate of decrease of reception field strength of the current cell is determined. If the rate of decrease exceeds a second threshold, the reception field strengths from a maximum number of radio base stations are measured. If the reception field strength of a current cell is over the first threshold and if the rate of decrease is under the second threshold, the reception field strengths of a reduced number of radio base stations are measured.

Fig. 2

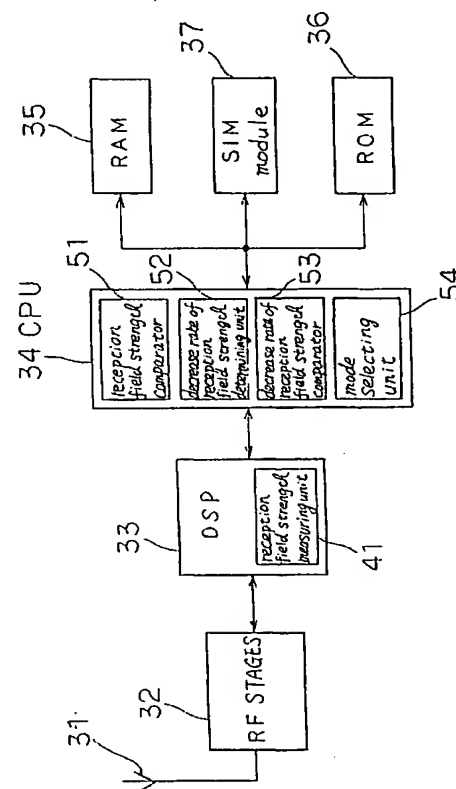

EP 1 026 910 A1

## Description

[0001] The present invention relates to a mobile radio station such as a GSM (Global System for Mobile communication) mobile phone, and particularly to a radio base station monitoring control by the mobile radio station.

[0002] In the GSM system, each radio base station reserves four TDMA frames every  $n$  multiframes as a paging channel. The value of  $n$  can be set for a particular radio base station to any value from 2 to 9. A single block of paging channel frames are long enough for the mobile radio station to listen to its current radio base station for any incoming call and to receive from two neighboring radio base stations in each frame and measure the signal strengths thereof. Thus the signal strength received from eight neighboring radio base stations can be monitored in every  $n$  multi-frame.

[0003] If two monitor operations are performed in every paging channel TDMA frame a considerable amount of power will be wasted, if the mobile radio station is, for example, at the center of a cell where it is unlikely that any hand-off to a neighboring radio base station will be required imminently.

[0004] On the other hand, although it is simple to arrange that fewer monitor operations are performed, this will have the effect of degrading cell reselection performance.

[0005] It is an object of the present invention to provide a mobile radio station for use in a mobile radio network in which the rate at which neighboring radio base stations are monitored can be reduced for power saving purposes without significantly degrading cell reselection performance.

[0006] The reception field strengths of a current cell and of signals transmitted from radio base stations neighboring the current cell are measured. If the reception field strength of a current cell is less than a first threshold that has been previously determined, a rate of decrease of reception field strength of the current cell is determined. If the rate of decrease exceeds a second threshold, reception field strengths of signals transmitted from a maximum number of previously determined radio base stations from among neighboring radio base stations are measured. If the reception field strength of a current cell is over the first threshold or if the rate of decrease is under the second threshold, the reception field strengths of signals transmitted from a number of radio base stations less than the maximum number from among neighboring radio base station are measured.

[0007] The above and other objects, features, and advantages of the present invention will become apparent from the following description based on the accompanying drawings which illustrate examples of preferred embodiments of the present invention, in which:

[0008] Fig. 1 is a diagram showing a cellular radio-telecommunication network including a mobile radio station of the present invention.

[0009] Fig. 2 is a block diagram showing an embodiment of a mobile radio station 30 shown in Fig.1.

[0010] Fig. 3 is a time chart showing how the PCH TDMA frames are separated.

[0011] Fig. 4 is a flow chart illustrating operation for determining the frequency of a reception field strength of mobile radio station 30 shown Fig.2.

[0012] Fig. 5a is a time chart showing how multiple measurements are performed within a single PCH TDMA frame.

[0013] Fig. 5b is a time chart showing a PCH TDMA frame when only a single measurement is performed.

[0014] Fig. 6 is a time chart showing how measurements are distributed among available PCH TDMA frames when the mode of reception field strength measuring unit 41 is set to a reduced monitoring mode.

[0015] As shown in Fig. 1, this network includes radio base stations 20-1~20-n which have cell 10-1~10-n as service area and mobile radio station 30 existing in cell 10-6.

[0016] Here, only one mobile radio station is shown in Fig.1, but a plurality of mobile radio stations exist in the service area.

[0017] Mobile radio station 30 includes, as shown in Fig.2, antenna 31 and RF stage 32 which receive data and control signals from radio base stations 20-1~20-n in the network and transmit a signal to the radio base station, digital signal processing (DSP) unit 33 which converts a received signal into a digital signal and stores the digital signal temporarily, CPU 34 which has RAM 35 and ROM 36 and processes the digital signal and receives user instructions from a keypad (not shown), and SIM (Single Instruction Multiple data stream) module 37 which is connected with CPU 34 and communicates with CPU 34 in a known manner. Further, digital signal processing unit 33 is responsible for many of the basic logic operations of mobile radio station 30.

[0018] Digital signal processing unit 33 has reception field strength measuring unit 41 which measures a reception field strength of a signal transmitted from the current radio base station and a reception field strength of a signal transmitted from a radio base station neighboring to the current radio base station. Reception field strength measuring unit 41 has two measuring modes of which one measuring mode is set up. One mode is a full monitoring mode which measures the reception field strengths of signals transmitted from a maximum number of previously determined radio base stations from among neighboring radio base stations. The other mode is a reduced monitoring mode which measures the reception field strength of a signal transmitted from a number of radio base stations less than the maximum number from among neighboring radio base stations.

[0019] CPU 34 has reception field strength comparator 51 which is means for second comparison and compares

the reception field strength of a signal of a current cell measured by reception field strength measuring unit 41 with a first threshold previously determined, decrease rate of reception field strength determining unit 52 which determines the rate of decrease of reception field strength of a current cell from a value measured by reception field strength measuring unit 41, decrease rate of reception field strength comparator 53 which is a means for first comparison and compares the rate of decrease determined by decrease rate of reception field strength determining unit 52 with a second threshold previously determined, and mode selecting unit 54 which selects the mode of reception field strength measuring unit 41 based on the result of decrease rate comparison by reception field strength comparator 53. The CPU 34 maintains a list, known as the BA (BCCH Allocation) list, of neighboring radio base stations Ids, and the frequencies on which their control channels are operating. The BA list is maintained on the basis of data transmitted by the current radio base station.

[0020] The CPU 34 also maintains a stored value of the last measured signal strength for each of the radio base stations 20-1~20-n in the BA list.

[0021] The current radio base station also provides data identifying the period separating paging channel (PCH) TDMA frames as a number from 2 to 9 representing the period in terms of the number of GSM multiframes which occur in the period. If the number (bs\_pa\_mfrms) is equal to 2, there will be a PCH frame in alternate multi-frames. If the number is equal to 9, there will be eight multi-frames between the multiframes which include a PCH frame.

[0022] Fig. 3 is a time chart showing how the PCH TDMA frames are separated.

[0023] Radio base station 20-1~20-n also provides data identifying the position of the PCH frame in a multi-frame, but this is not pertinent to the present invention and will not be referred to hereinafter.

[0024] Conventionally, when mobile radio station 30 is in the idle mode (i.e. no call is connected) digital signal processing unit 33 measures reception field strengths of signals transmitted from the neighboring radio base stations at the rate of two such measurements in every PCH frame.

[0025] In this way, the data about the reception field strength of signals transmitted from the neighboring radio base stations is kept as up-to-date as possible, so that, when a hand-off is required, mobile radio station 30 already has all the data it needs to select a new radio base station from the BA list and commence the hand off.

[0026] In the arrangement now described, the frequency of measuring the reception field strengths of a signals transmitted from the neighboring radio base stations is reduced in normal operation so that power used by such measuring is conserved except when a hand-off is judged to be imminently required.

[0027] Fig. 4 is a flow chart illustrating operation for determining the frequency of a reception field strength of mobile radio station 30 shown Fig.2.

[0028] At the start of this routine, a variable **n\_mons** is set to a value of 1 and a variable **mon\_n\_in\_5pch** is set to a value determined in accordance with the value of the parameter **bs\_pa\_mfrms** previously referred to at step S1.

[0029] As shown in Fig.4 the value of **mon\_n\_in\_5pch** is set to the integer part of five ninths of **bs\_pa\_mfrms** plus 0.5. Thus **mon\_n\_in\_5pch** will be 1 if **bs\_pa\_mfrms** has its minimum value (2), or 5 if **bs\_pa\_mfrms** has its maximum value (9) and will vary accordingly between these limits.

[0030] Reception field strength comparator 51 compares a reception field strength **serv\_level** of signal transmitted from radio base station of current cell measured by reception field strength measuring unit 41 with a first threshold **thresh** (for example -90dbm) previously determined at step S2.

[0031] If a reception field strength **serv\_level** is less than the threshold, a value **data\_eff** representing the effective decrease of a reception field strength of the current cell since the measuring the reception field strength is calculated at step S3.

$$\text{Delta\_eff} = \text{delta\_serve} \times n\_neigh / 4 \times 5 / \text{mon\_n\_in\_5pch}$$

where **delta\_serve** is the actual decrease in the signal strength since the previous measuring, and **n\_neigh** is the number of radio base stations listed in the BA list.

[0032] Decrease rate of reception field strength comparator 53 compares the calculated value of **delta\_eff** with a value **step** (e.g. 12 db) which represents the maximum acceptable effective decrease in signal between monitors at step S4.

[0033] If the value of **delta\_eff** is exceeded the value of **n\_mons** is set to 2 (its maximum value) and the value of **mon\_n\_in\_5pch** is set to 5 (its maximum value at step S5).

[0034] If a reception field strength **serv\_level** is not less than the first threshold at step S2, or if the value of **delta\_eff** does not exceed the value **step**, the routine terminates.

[0035] After that, the value of a multi-frame count and a pch frame count used by the DSP to determine whether monitoring should be carried out in a particular PCH frame are reset at step S6.

[0036] Mode selecting unit 54 of CPU 34 uses the variables **n\_mons** and **mon\_n\_in\_5pch** to select the mode of reception field strength measuring unit 41.

[0037] Fig. 5a is a time chart showing how multiple measurements are performed within a single PCH TDMA frame. And Fig. 5b is a time chart showing a PCH TDMA frame when only a single measurement is performed.

[0038] If **n\_mon** is set to 2, mode selecting unit 54 sets the mode of reception field strength measuring unit 41 for measuring two time within a single PCH frame as shown in Fig.5a. And if **n\_mon** is set to 1, mode selecting unit 54 sets the mode of reception field strength measuring unit 41 for measuring one time within a single PCH frame as shown Fig.5b.

[0039] Fig. 6 is a time chart showing how measurements are distributed among available PCH TDMA frames when the mode of reception field strength measuring unit 41 is set to a reduced monitoring mode.

[0040] As shown Fig.6, if the value of **mon\_n\_in\_5pch** is set to 1, only the first possible PCH slot in each block of five PCH slots is used for measuring a reception field strength. No measurements are performed in the other 4 PCH blocks.

[0041] If the value of **mon\_n\_in\_5pch** is set to 2, the first two frames will be used for measuring a reception field strength and so on up to 5.

[0042] The CPU 34 maintains separate counts of multi-frames which it resets periodically to enable it to keep measuring of reception field strengths synchronised. These are the counts which are reset by the CPU 34 when the full monitoring mode is commenced.

[0043] In the above embodiment, the value **mon\_n\_in\_5pch** is set to a value determined in accordance with the value of the parameter **bs\_pa\_mfrms**, but **mon\_n\_in\_5pch** can be derived from a look-up table.

[0044] While a preferred embodiment of the present invention has been described using specific terms, such description is for illustrative purposes only, and it is to be understood that changes and variations may be made without departing from the spirit or scope of the following claims.

## Claims

### 1. A mobile radio station comprising:

means for measuring, provided with a full monitoring mode which measures reception field strengths of a signal transmitted from a maximum number of previously determined radio base stations from among neighboring radio base stations and a reduced monitoring mode which measures a reception field strength of a signal transmitted from a number of radio base station less than said maximum number from among neighboring radio base stations, and periodically a reception field strength of a current cell and of signals transmitted from radio base stations neighboring the current cell by one of said two modes;

means for determining the rate of decrease of the reception field strength of the current cell measured by said means for measuring;

means for first comparison which compares the rate of decrease determined by said means for determining with a threshold that has been previously determined; and

means for selecting said full monitoring mode of said means for measuring when the rate of decrease of reception field strength of the current cell measured by said means for measuring exceeds said threshold, and selecting said reduced monitoring mode when the rate of decrease of reception field strength of the current cell measured by said means for measuring do not exceed said threshold.

### 2. A mobile radio station according to claim 1 further comprising;

means for second comparison which compares the reception field strength of the current cell measured by said means for measuring with a second threshold previously determined, wherein said means for determining determines the rate of decrease of reception field strength of the current cell only if the reception field strength of the current cell measured by said means for measuring is less than said second threshold.

### 3. A mobile radio station according to claim 1 or 2, wherein

said means for measuring receives an indication of the frequency of time-slots available for measuring said reception field strength from said radio base stations.

### 4. A mobile radio station according to claim 3, wherein

said means for measuring is able to measure reception field strengths of signals transmitted from more than one neighboring radio station in a time-slot.

5. A mobile radio station according to claim 4, wherein  
said means for measuring measures a maximum number of the reception field strengths in each available TDMA frame in said full monitoring mode.
- 5 6. A mobile radio station according to claim 5, wherein  
said means for measuring measures reception field strengths in a TDMA frame in said reduce monitoring mode.
- 10 7. A mobile radio station according to claim 6, wherein  
said means for measuring measures reception field strengths in the selected available time-slots in said reduce monitoring mode.
- 15 8. A mobile radio station according to claim 7, wherein  
the selection of the number of time-slots for measuring reception field strengths is determined by said indication of the frequency of time-slots available.
9. A method for use in a mobile radio station according to any of claims 1 to 8.

20

25

30

35

40

45

50

55

Fig. 1

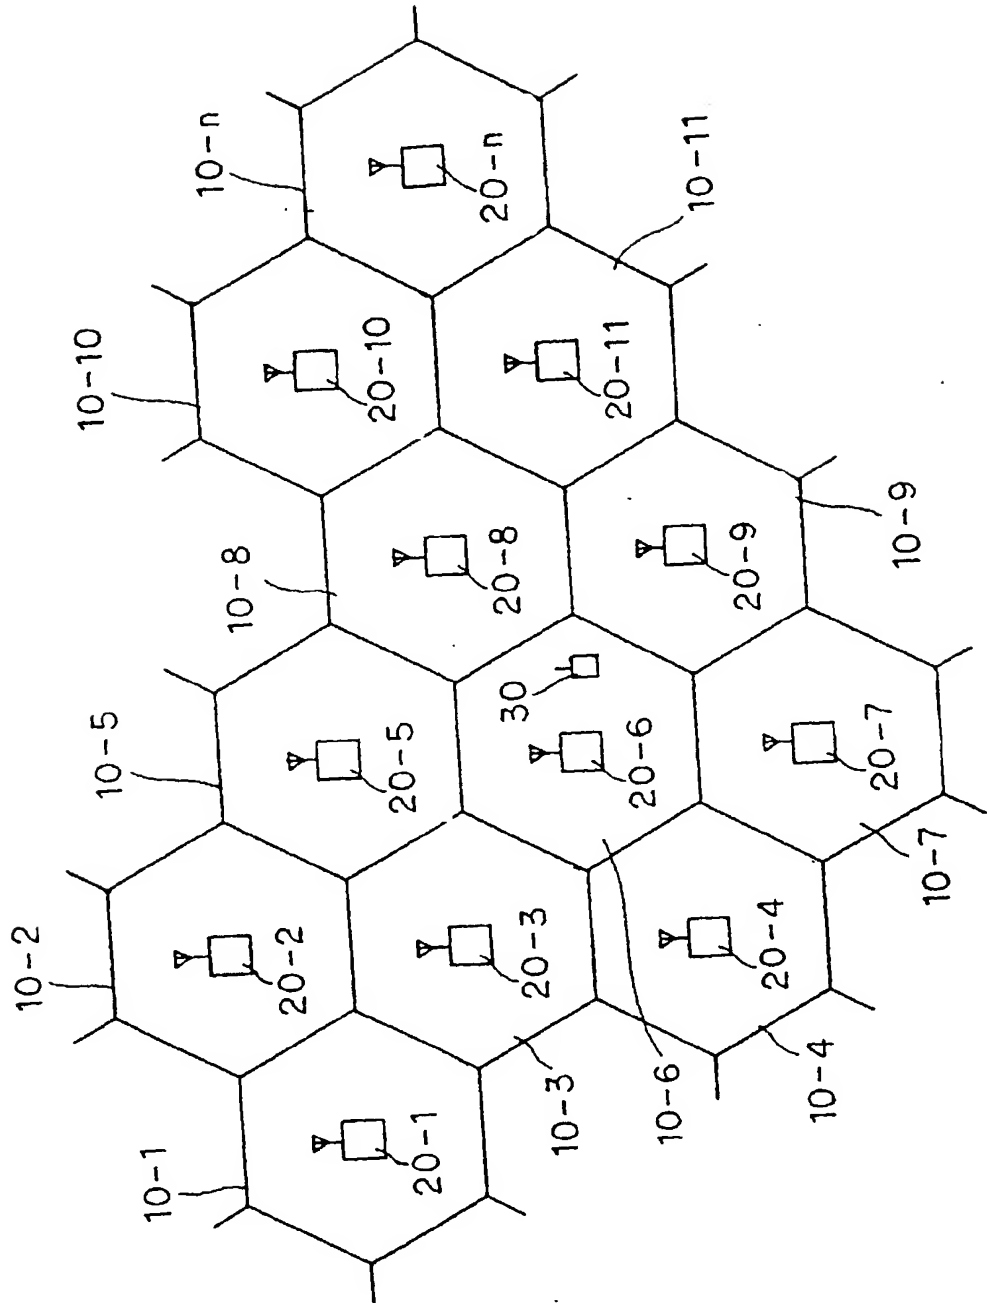


Fig. 2

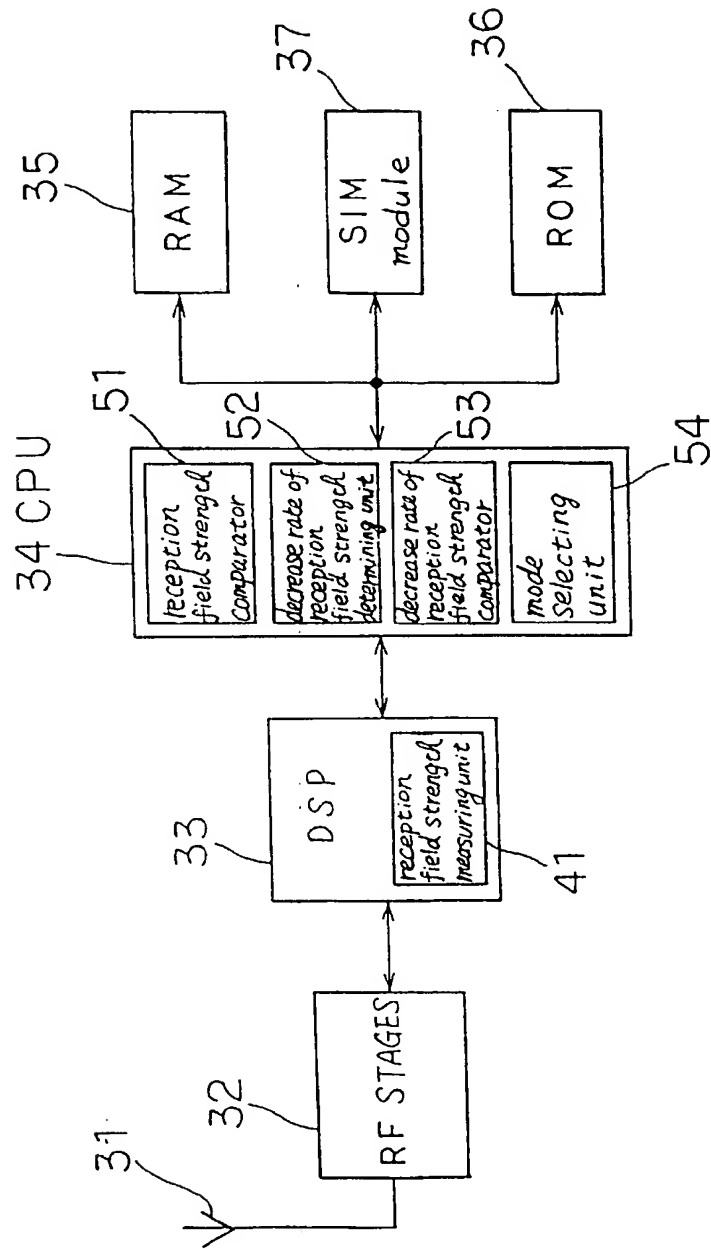


Fig. 3

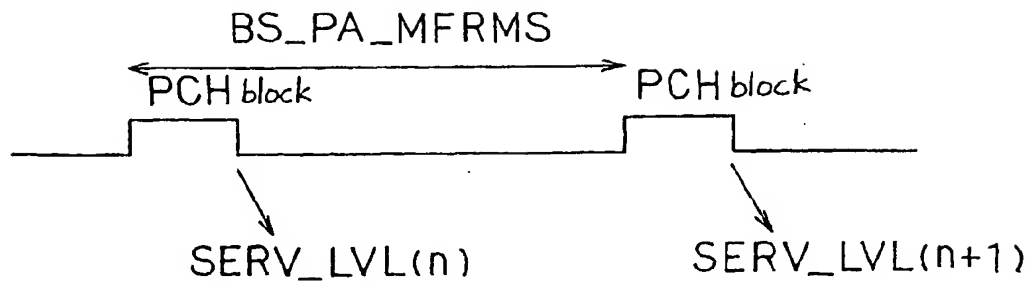
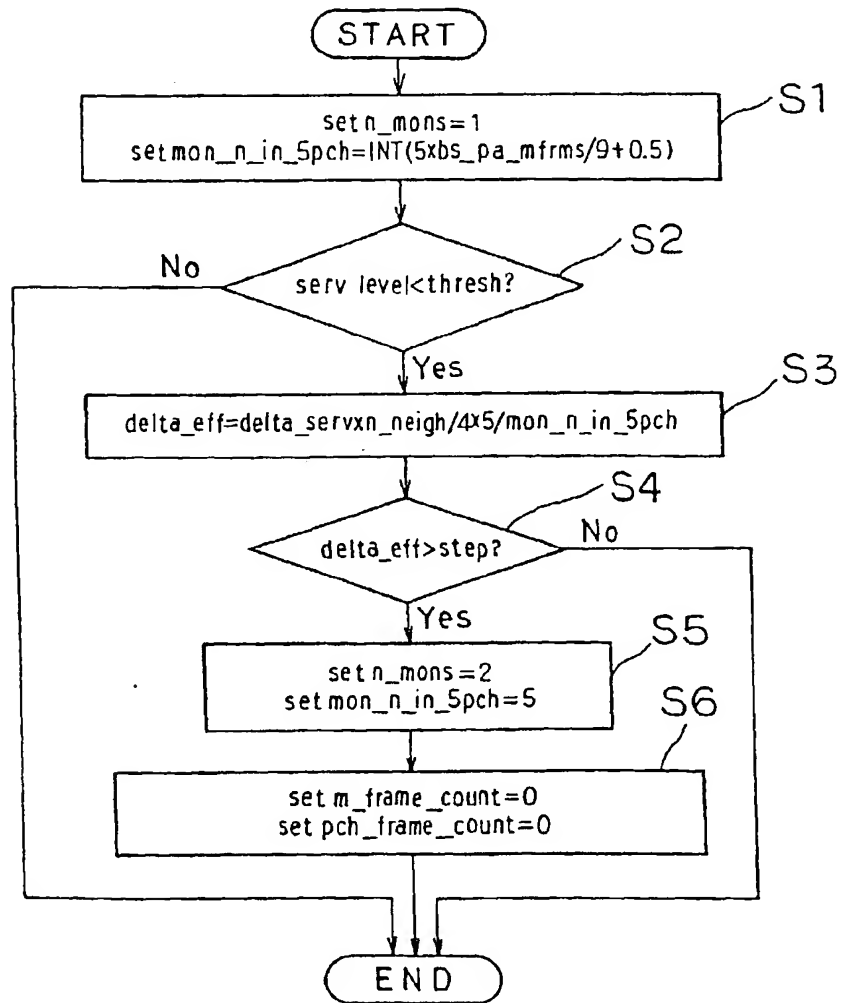


Fig. 4





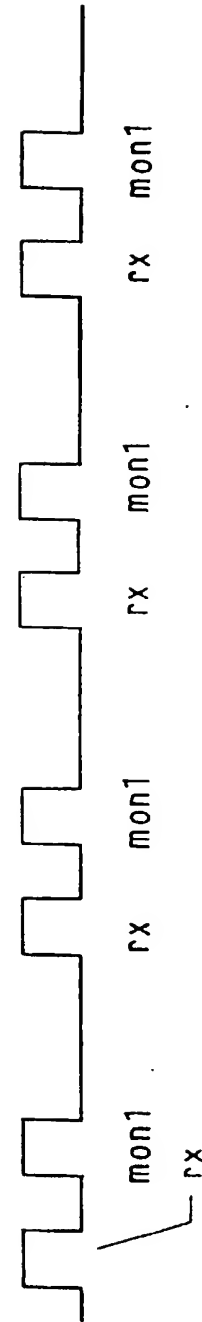


Fig. 6

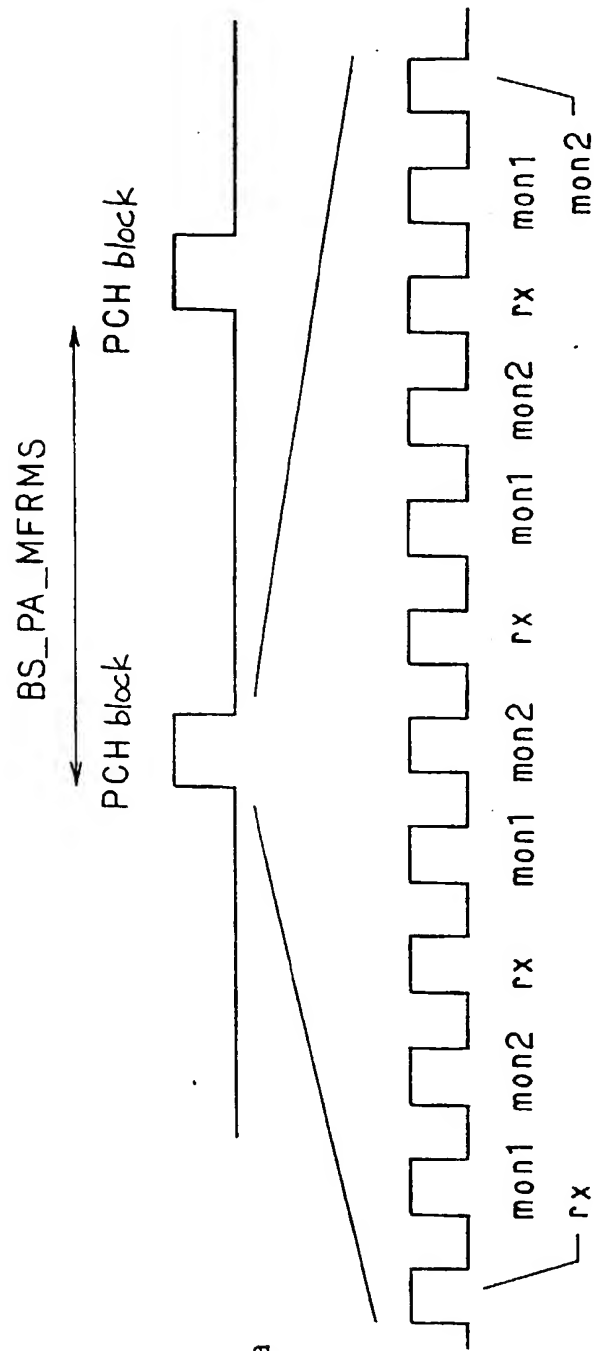

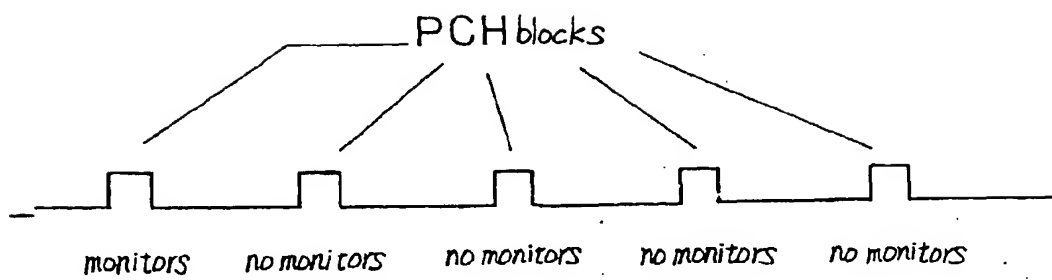

European Patent  
Office

# EUROPEAN SEARCH REPORT

Application Number  
EP 99 10 2399

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
X	EP 0 812 119 A (NOKIA MOBILE PHONES LTD) 10 December 1997 (1997-12-10) * page 2, line 36 - page 3, line 8 * * page 7, line 1 - line 12 * * page 9, line 37 - page 10, line 4 * ---	1,3,5,9	H04Q7/32
A	US 5 574 996 A (RAITH) 12 November 1996 (1996-11-12) * column 6, line 46 - column 11, line 32 * -----	1,3-9	
			TECHNICAL FIELDS SEARCHED (Int.Cl.7)
			H04Q
The present search report has been drawn up for all claims			
Place of search BERLIN		Date of completion of the search 9 July 1999	Examiner Rothlübbers, C
<p>CATEGORY OF CITED DOCUMENTS</p> <p>X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document</p> <p>T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons</p> <p>&amp; : member of the same patent family, corresponding document</p>			

EPO FORM 1503 03/82 (P04C01)

**ANNEX TO THE EUROPEAN SEARCH REPORT  
ON EUROPEAN PATENT APPLICATION NO.**

EP 99 10 2399

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.  
The members are as contained in the European Patent Office EDP file on  
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

09-07-1999

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
EP 0812119 A	10-12-1997	CN 1183702 A	03-06-1998
US 5574996 A	12-11-1996	US 5539748 A	23-07-1996
		US 5603081 A	11-02-1997
		US 5883885 A	16-03-1999
		AU 681721 B	04-09-1997
		AU 8131494 A	23-05-1995
		BR 9405705 A	28-11-1995
		CA 2152943 A	11-05-1995
		CN 1117330 A	21-02-1996
		EP 0679304 A	02-11-1995
		FI 953268 A	30-06-1995
		JP 8508629 T	10-09-1996
		NZ 276006 A	24-11-1997
		SG 43316 A	17-10-1997
		WO 9512932 A	11-05-1995
		AU 681730 B	04-09-1997
		AU 1048095 A	23-05-1995
		AU 680071 B	17-07-1997
		AU 1048395 A	23-05-1995
		AU 691850 B	28-05-1998
		AU 1087495 A	23-05-1995
		AU 685885 B	29-01-1998
		AU 1087695 A	23-05-1995
		AU 695892 B	27-08-1998
		AU 2079997 A	24-07-1997
		AU 2358897 A	14-08-1997
		AU 690924 B	07-05-1998
		AU 7757094 A	18-05-1995
		AU 7865898 A	15-10-1998
		AU 7865998 A	01-10-1998
		AU 697210 B	01-10-1998
		AU 8131394 A	23-05-1995
		BR 9404316 A	04-07-1995
		BR 9405702 A	28-11-1995
		BR 9405703 A	28-11-1995
		BR 9405704 A	28-11-1995
		BR 9405743 A	05-12-1995
		BR 9405927 A	05-12-1995
		CA 2134695 A	02-05-1995
		CA 2152942 A	11-05-1995
		CA 2152944 A	11-05-1995
		CA 2152945 A	11-05-1995
		CA 2152946 A	11-05-1995
		CA 2152947 A	11-05-1995
		CN 1112345 A	22-11-1995

EPO FORM P0459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82

